

# Magnabosco

Quality Steam Boilers since 1960

## GVR-Hybrid

NEW

NEW



Hybrid steam boiler

Gas and Electric


Diesel and Electric



Azienda  
certificata UNI  
EN ISO 9001  
WELD

# GVR-Hybrid

PED  
made with the  
directive  
2014/68/EU

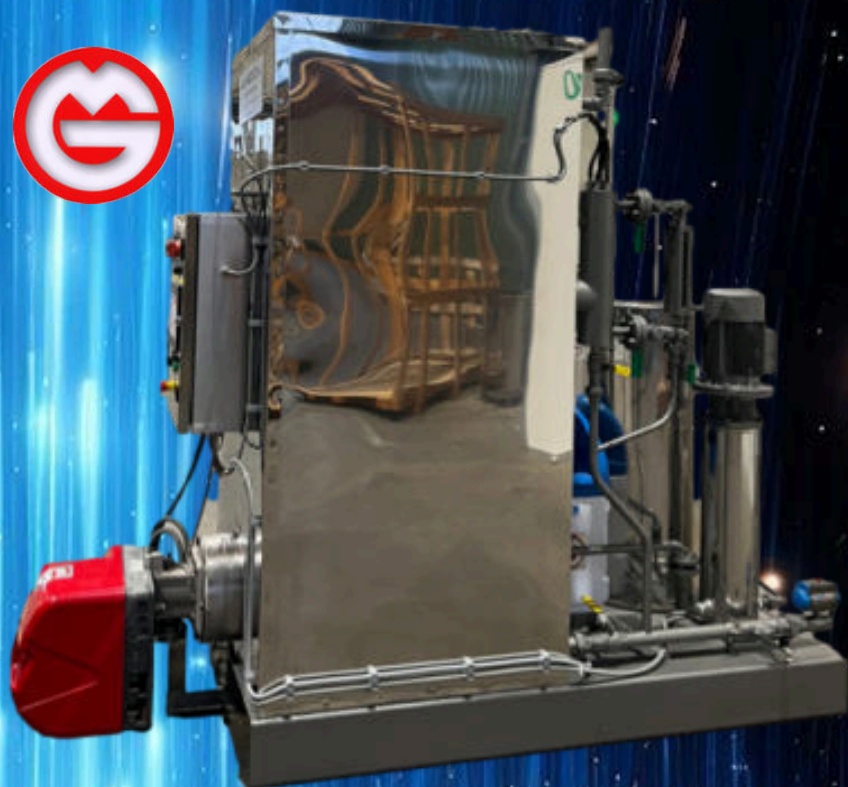

GVR HYBRID	100	150	250	350	500	750	1000	1500	2000
produzione vapore/ steam production gas o diesel	kg 50	100	190	270	400	650	880	1250	1750
produzione vapore/ steam production electric	kg 50	50	60	80	100	100	120	250	250
Kg. Vapore Totale/ Total Steam	100	150	250	350	500	750	1000	1500	2000
Gas or Diesel Potenza/ Power kW	40	80	145	205	300	500	670	1000	1300
kW installati/ kW electric power	40	40	45	60	80	80	90	150	200
Tot potenza/ Power kW	80	120	190	265	380	580	760	1150	1500
BHP	8	12	19	27	38	58	76	115	150
HP	109	163	258	360	517	790	1033	1550	2050
kcal/h	66000	99000	165000	231000	330000	495000	660000	990000	1320000
1000BTU/h	273	410	680	950	1360	2050	2730	4100	5460
Pressione/Pressure from/to - bar	1*7-10-12-30	1*7-10-12-30	1*7-10-12-30	1*7-10-12-30	1*7-10-12-30	1*7-10-12-30	7*-10-12-30	10-12-30	10-12-30
From/to Mpa	0,1-0,7-1-1,2-3	0,1-0,7-1-1,2-3	0,1-0,7-1-1,2-3	0,1-0,7-1-1,2-3	0,1-0,7-1-1,2-3	0,7-1-1,2-3	0,7-1-1,2-3	1-1,2-3	1-1,2-3
From/to PSI	101-144-173-432	101-144-173-432	101-144-173-432	101-144-173-432	101-144-173-432	101-144-173-432	101-144-173-432	144-173-432	144-173-432
<b>CONSUMO COMBUSTIBILE</b>		<b>CONSUMO / CONSUMPTION</b>							
Gas m3/h	3,5	7,5	14,5	20	32	48	66	92	115
Gasolio/gasoil Kg/h	3	6	9	16,9	28	43	58	87	174
Nafta/Fuel/Oil Kg/h	3,1	7	13,3	18	30	44	60	90	180
<b>DIMENSIONI/DIMENSION mm</b>		<b>DIMENSIONI/DIMENSION mm</b>							
A/A1 mm	1300/100	1300/100	1450/200	1450/200	1650/400	1680/500	1800/500	2400/600	2800/800
B mm	800	800	800	800	900	900	900	1500	2000
H mm	1900	1900	1900	2200	2050	2480	2480	2480	2480
Peso/weight kg	650	700	750	800	1100	1400	1800	2500	3000
consumo/consumption kW/h	2,42	2,42	3,48	3,63	4,84	5,85	6,96	10,160	10,210
Presa Vapore/ Steam outlet DN	15	15	20	32	32	32	40	50	50
Diametro Max. Boccaglio mm	148	148	148	148	185	185	185	200	250
Diametro Max. Camino mm	130	130	140	200	200	200	200	300	350
Contro pressione/ Back pressure mm	20	20	20	30	30	35	35	40	45
H2O consigliata/ recommended	durezza *F0,5 alcalinità 1200 P.P.M. Ca Co.								

A Richiesta/On Requested:1-Economizzatore/Economizer 2- Compact Version Surriscaldatore/Overheater (\*di serie/included) \*SENZA PATENTATO

**MAGNABOSCO STEAM BOILERS 36030 ZUGLIANO-VI-ITALY**

TEL. 0445/330111 magnabosco@magnabosco.com

**www.magnabosco.com**

By BoscoBoilers2024